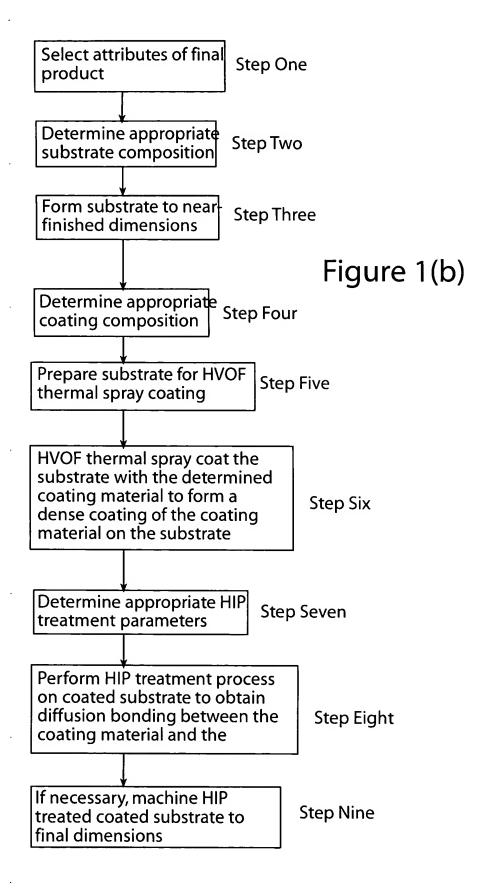


Figure 1(a)



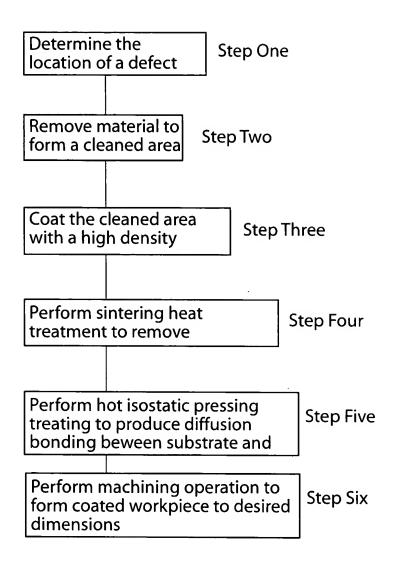
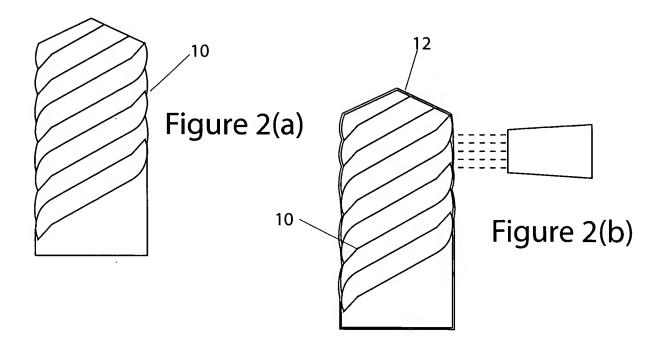
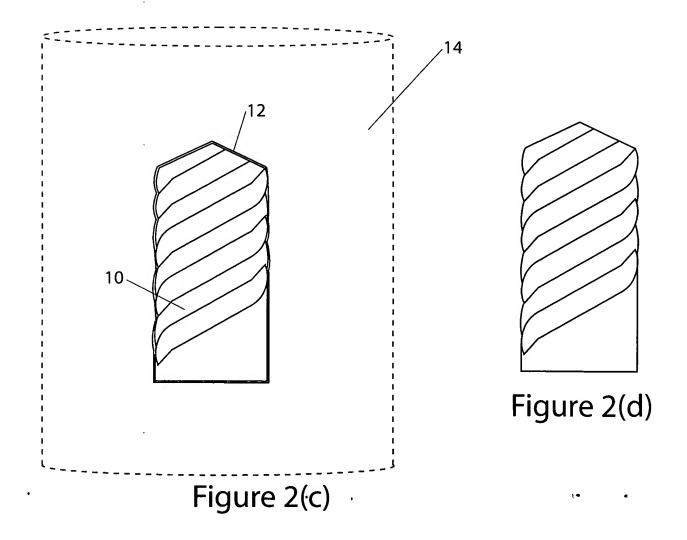
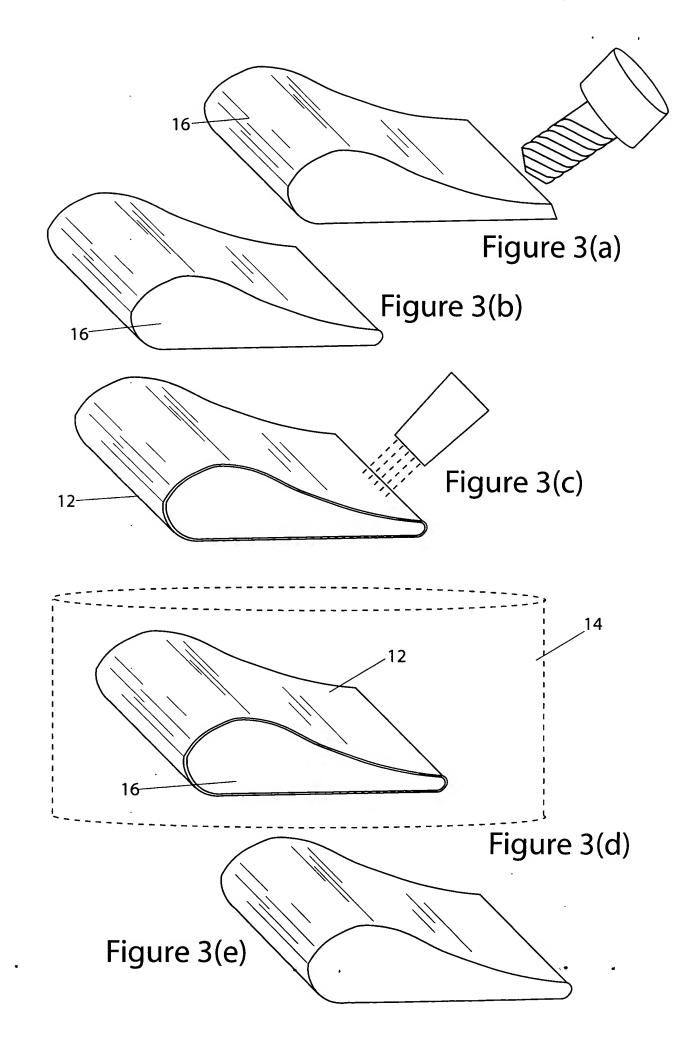
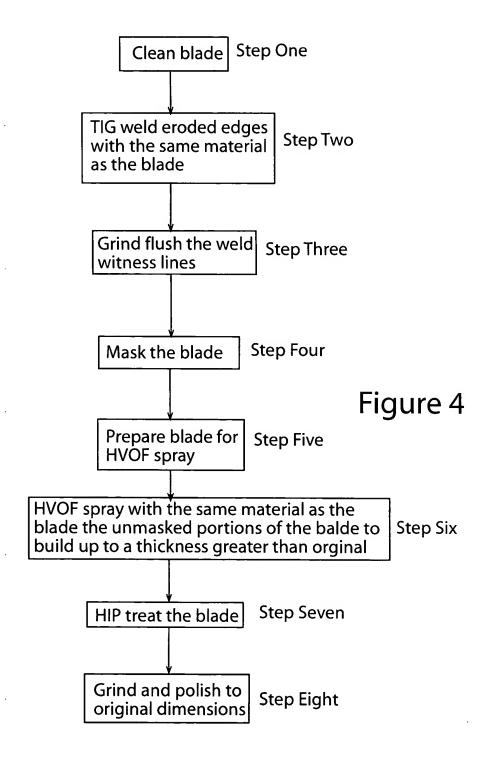


Figure 1(c)









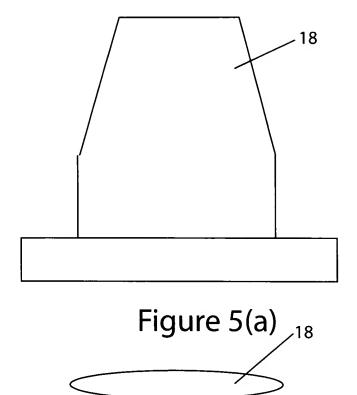
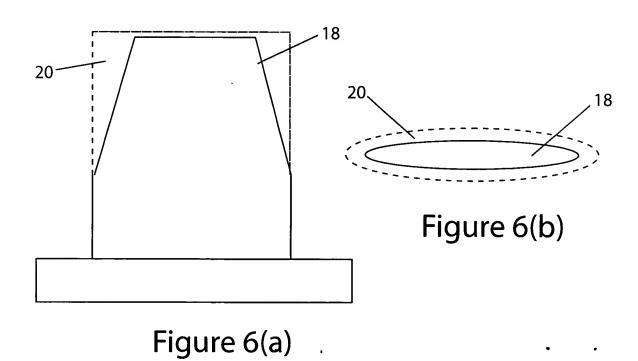
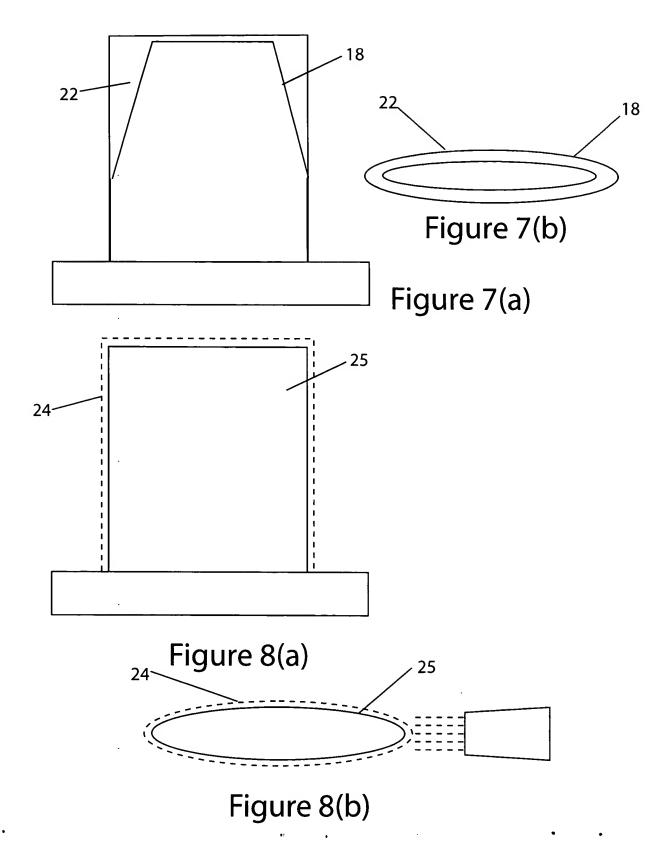
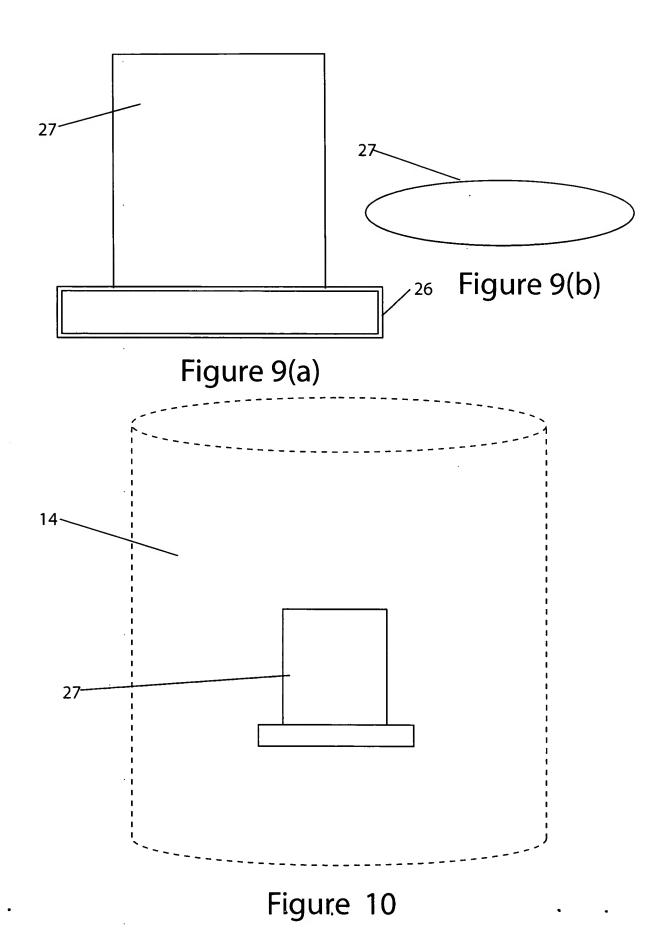


Figure 5(b)







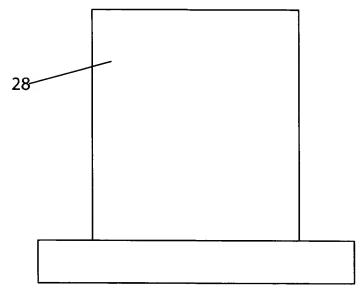
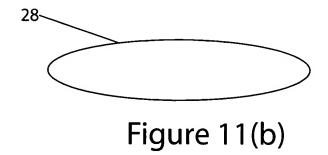


Figure 11(a)



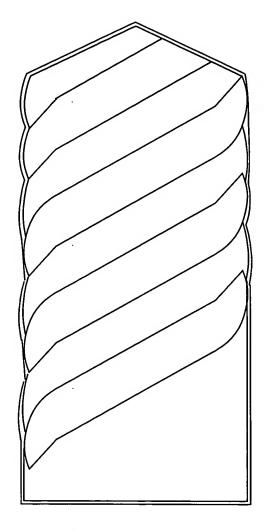
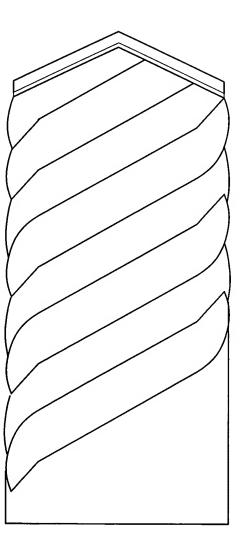


Figure 12(a) Prior Art





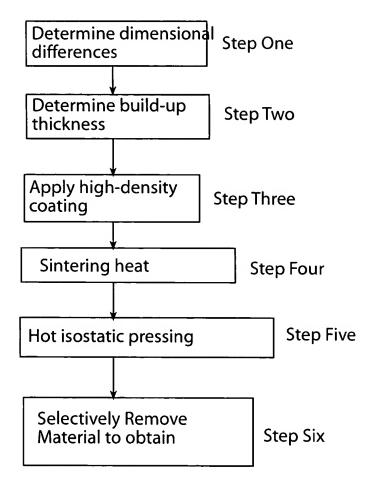


Figure 13



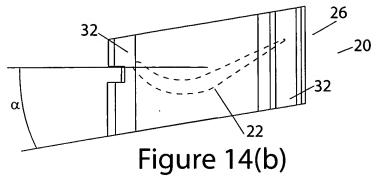



Figure 14(c)

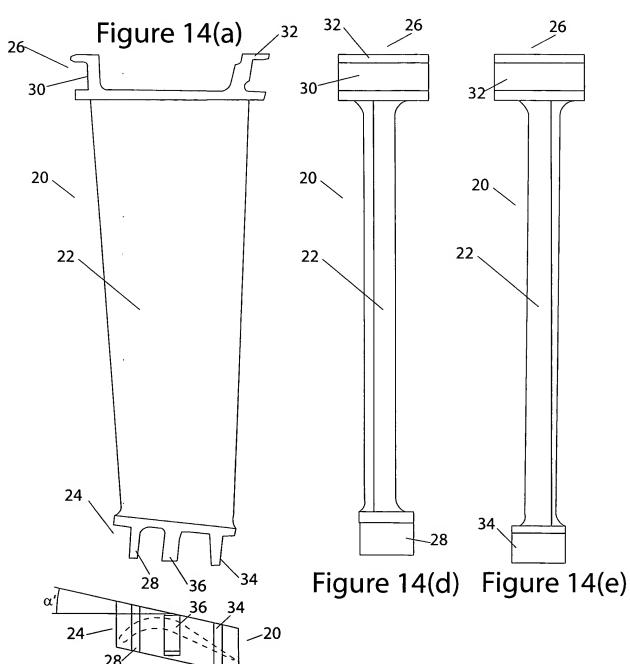


Forming a Diffusion Bonded Protective Coating on a Workpiece

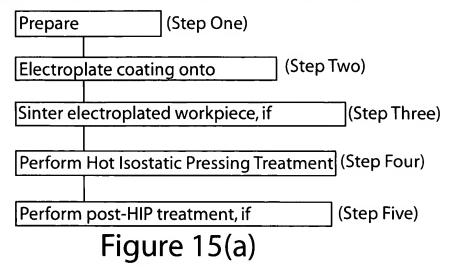

Method for Repairing a Turbine Engine Airfoil Part

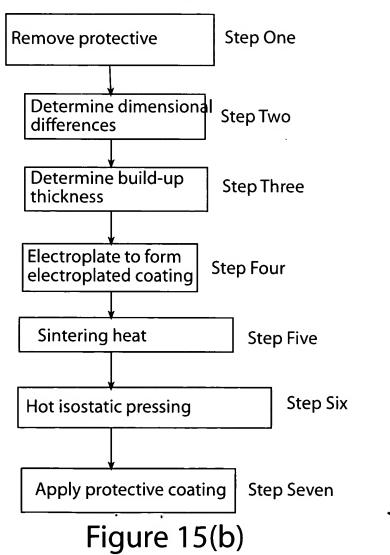



## Method for Correcting Defects in a

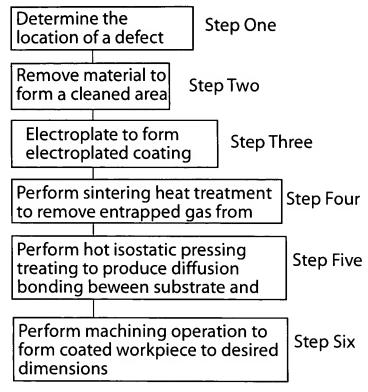



## Figure 15(c)


## Method for Reclassifyling an Airfoil Part

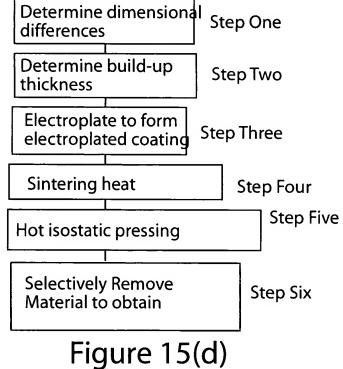


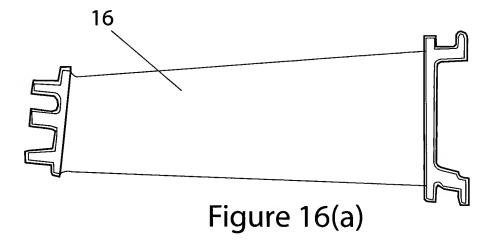

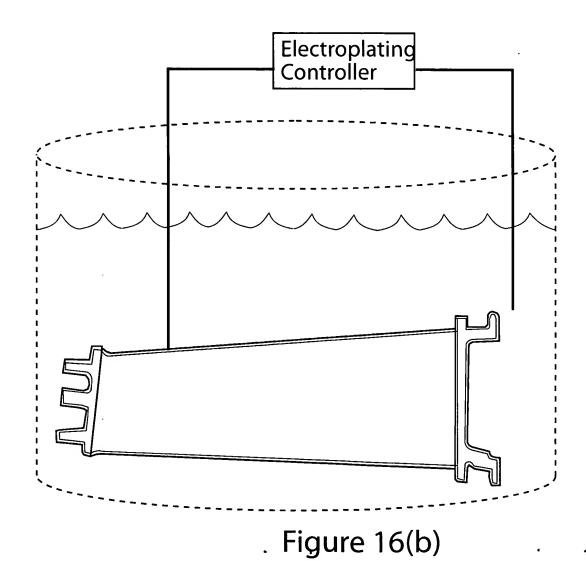

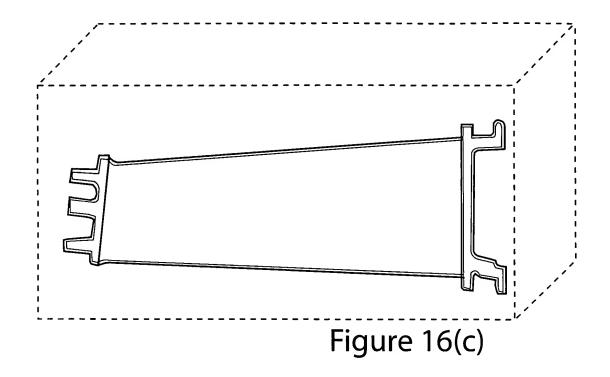

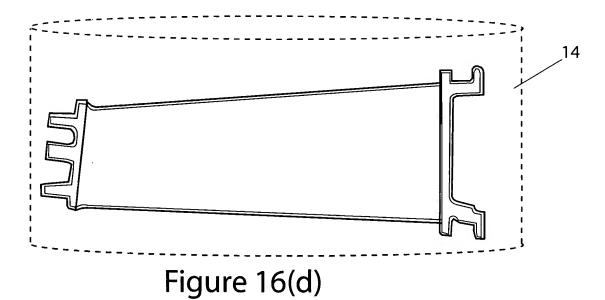

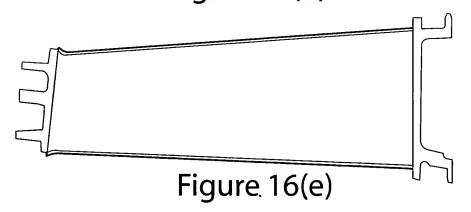

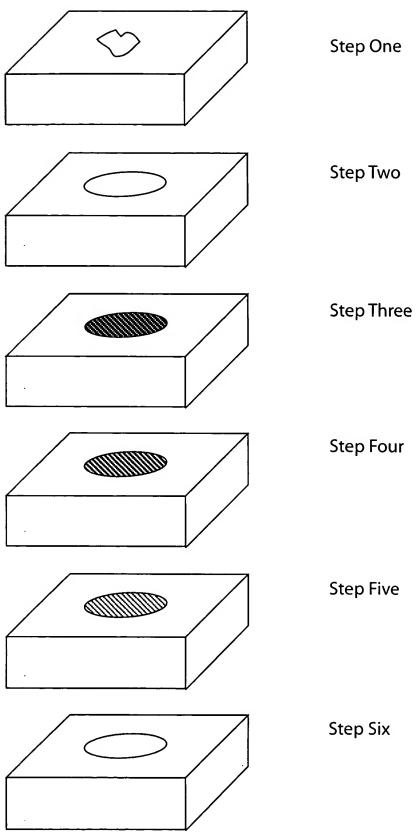


Figure 17

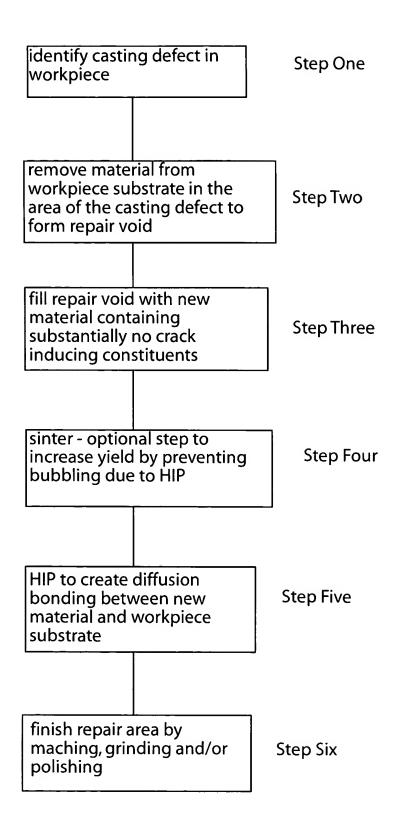
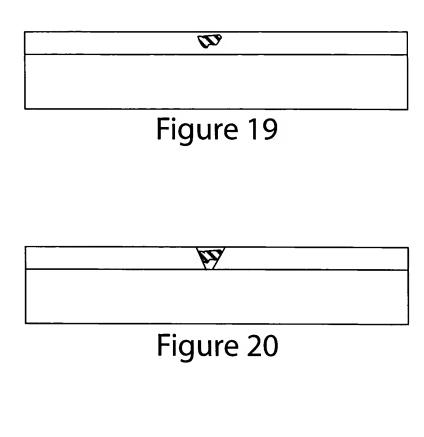


Figure 18






Figure 21

